


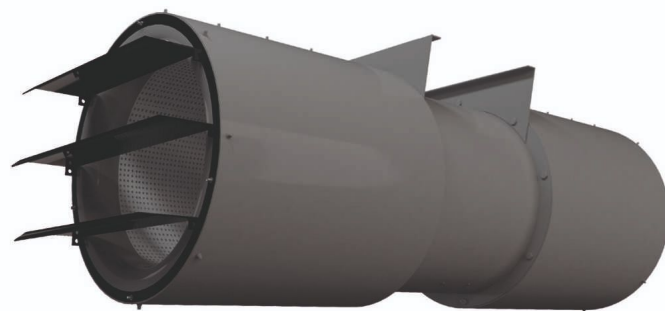
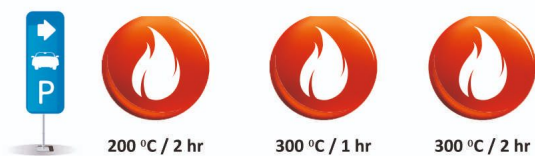


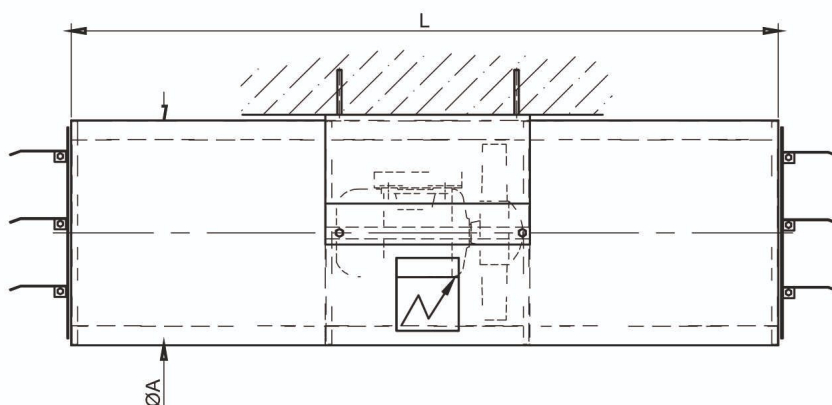

- 2 speed motors for daily ventilation and in case of fire
- %100 unidirectional option
- Galvanized steel case (TS EN ISO 1461)
- Guard grill and adjustable deflector
- Self-sound absorber fan case
- Insulation class H, IP55 high efficiency IE2 motors
- EN 12101-3 certified - 200°C/2h , 300°C/1h , 300°C/2h

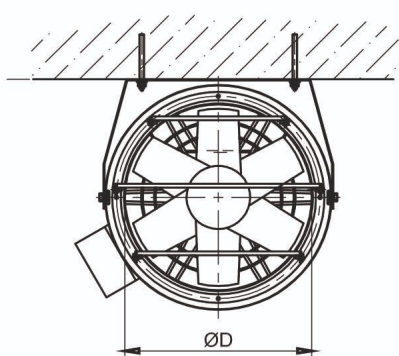

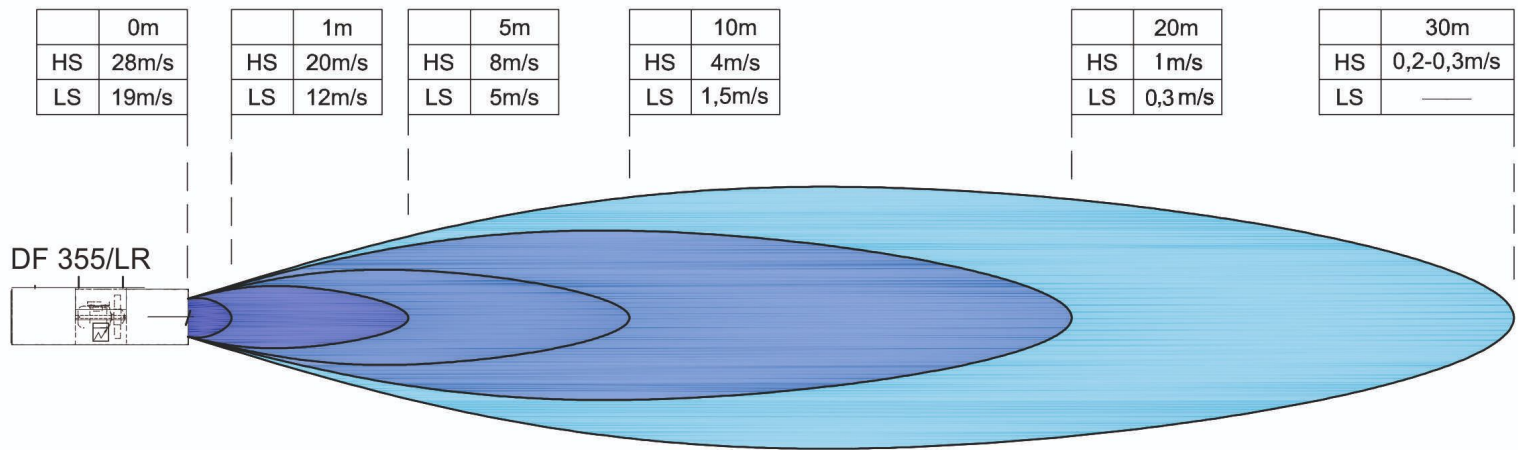


TYPE	ØA	ØD	L
315/LR	400	330	1500
355/LR	425	355	1500
400/LR	480	400	2000
500/LR	600	500	2400

All dimensions are in mm.

315/LR

(1) Velocity Magnitude - m/s

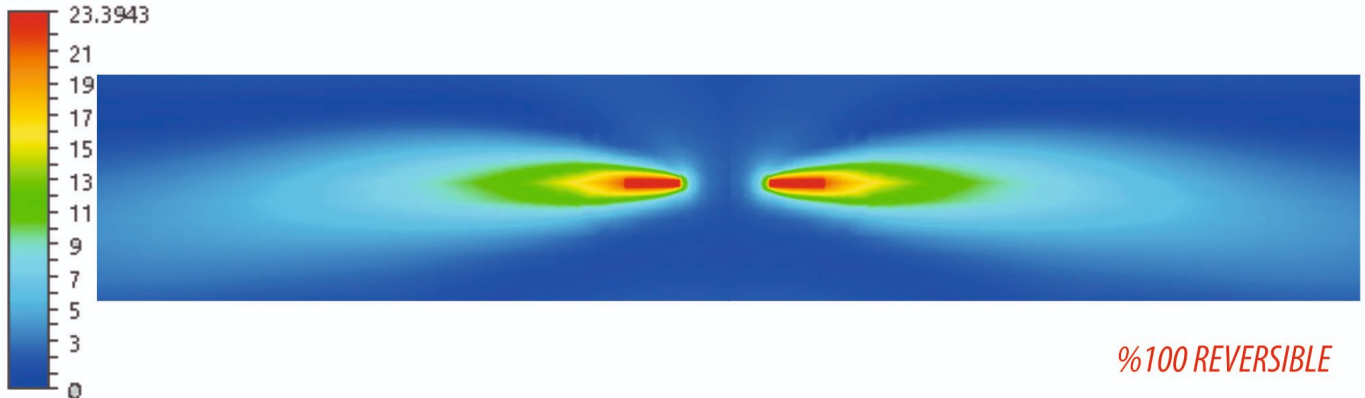

TYPE 400/LR AXIAL JET FAN VELOCITY CHART

0 m	0.5m	1m	5m	10m	15m	20m	25m	30m	35m	40m
23.4 m/sn	20.3 m/sn	17.2 m/sn	9.4 m/sn	5.2 m/sn	3 m/sn	2 m/sn	1 m/sn	0.6 m/sn	0.3 m/sn	0.2 m/sn

CODE	TYPE	kW	A	m³/h	N	LWA [dB(A) 3m]
4300801	315/LR	0,17 / 0,75	0,6 / 1,8	2700 / 4788	10 / 40	48 / 63
4300802	355/LR	0,33 / 1,1	0,9 / 2,8	3060 / 5400	13 / 50	51 / 67
4300803	400/LR	0,50 / 2,00	1,2 / 4,2	5580 / 10440	20 / 80	56 / 72
4300804	500/LR	0,9 / 3,8	1,9 / 7,7	9720 / 15120	47 / 106	60 / 68